



THWY6-100
SINGLE MAST LIFT

SPECIFICATION

01

Model

THWY6-100

Platform height

6m

Working height

8m

Load capacity

100kg

Platform size

0.6x0.6m

Overall size

1.28x0.8x1.9m

Power

AC / DC

Weight

280kg

Voltage

AC220/50HZ, or customize

Wheels

Polyester solid tyre / Rubber pneumatic tyre

Lifting speed

4-6m/min

TUHE Single Mast Lift

Jinan Tuhe Heavy Industry Machinery Co., Ltd.



Easy To Operate

Bottom button control and remote control are standard, also can make platform button control.



Walking Assist Device

With this motor device you can move the lift easily.



Color Optional

Blue, red, green, black...We can customize the color and logo for you.



Explosion-proof Cylinder

Explosion-proof valves on the cylinder can keep the lift and people safe, also provide long-lasting protection.

Detail Name

Description And Picture

Emergency Lowering Valve

When power cut or anything bad happens, you can lower the platform by loosen this valve.



Level Vial

Before lifting up, the level must be sure it is horizontal.



Bottom Control

You can control the lift go up and go down by this button.



Remote Control

Standard control, you can control the lift on the platform.



Detail Name

Description And Picture

Outriggers

Before you use the lift, you must open the outriggers and make it level.




Solid Universal Wheel

It makes no harm to the floor, you can move the lift indoors easily.



Limit Switch

The lift will stop at position when it touches this switch.

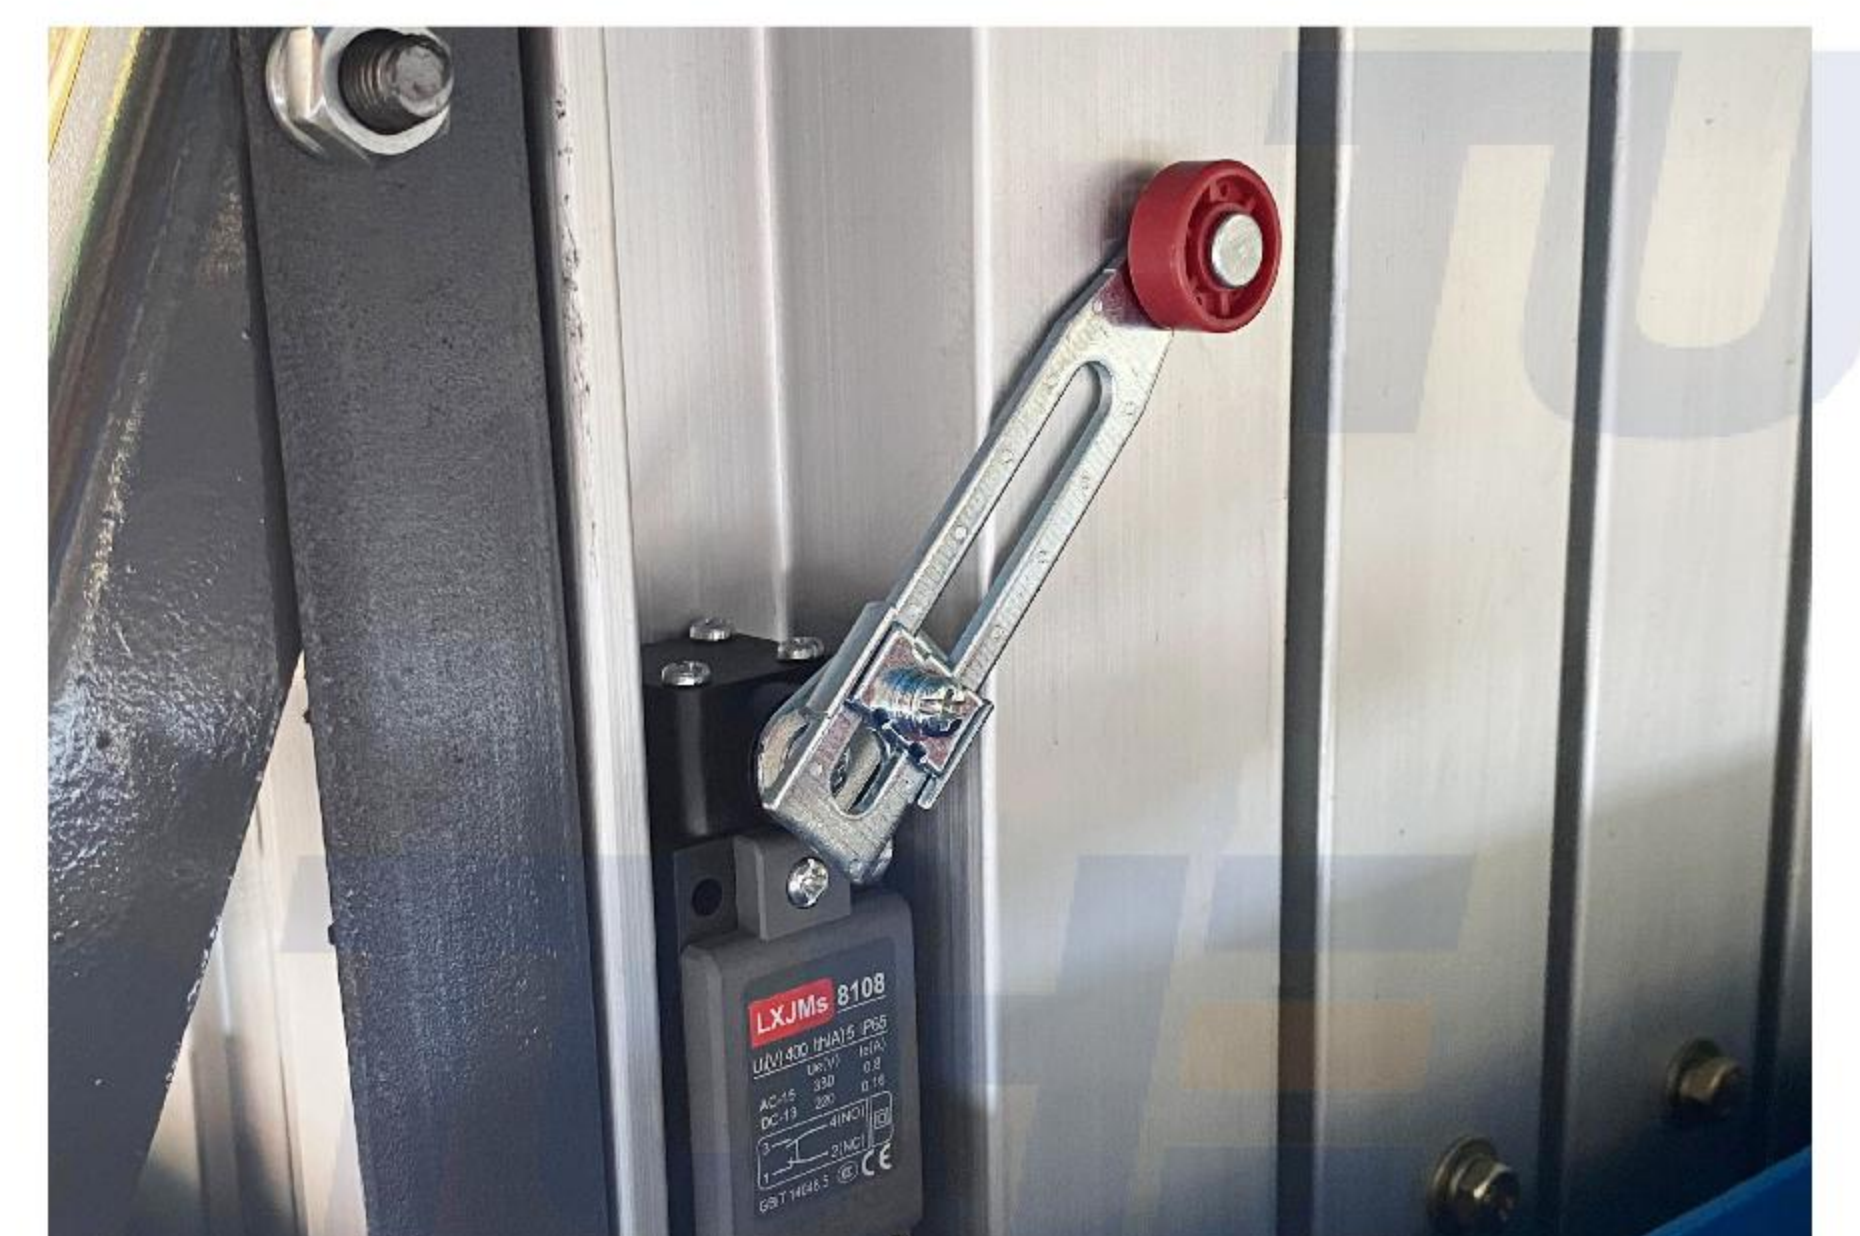

High Strength Aluminium Alloy

Strong and durable material makes the lift stable to be used.

